

# HS-420RT Series Vibration Sensor

PUR Cable, Dual Output - 4-20mA and Temperature (PT100)



## Typical Applications

- Low cost on-line means of monitoring with the capability of interfacing direct into PLC, BMS or any 4-20mA input module.  
Proven use in vibration monitoring for offline applications using commercially available data collectors.
- **Protecting...**  
Fans, Motors, Pumps, Compressors, Centrifuges, Conveyers, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, HVAC, Spindles, Machine Tooling, Process Equipment and many more.

## Technical Performance

Mounted Base Resonance	5 kHz min.
Velocity Ranges	0-10 to 0-100 mm/sec RMS $\pm$ 10%
	Nominal 80 Hz at 22°C
Frequency Response	10 Hz to 1 kHz $\pm$ 5 % - ISO10816
Isolation	Base isolated
Measurement Range	50 g peak
Temperature Output	PT100 (100 Ohms)
Transverse Sensitivity	Less than 5%

## Electrical

Outputs - Velocity	4-20 mA DC proportional to RMS Velocity Range
- Temperature	PT100 (100 Ohms)
Supply Voltage	15 - 30 Volts DC (for 4-20 mA)
Settling Time	2 seconds
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	>10 <sup>8</sup> Ohms at 500 Volts

## Environmental


Operating Temperature Range	-25 to 90 °C
Sealing	IP68
Maximum Shock	5000 g
Emissions	EN61000-6-4:2007
Immunity	EN61000-6-2:2005

## Mechanical


Case Material	Stainless Steel
Sensing Element/Construction	PZT/Compression
Mounting Torque	8 Nm
Weight	150 gms (nom)
Maximum Cable length	1000 metres
Cable	Blue PUR Cable
Options	Ranges, connector, other cable lengths

# HS-420RT Series Vibration Sensor


## Dimensions

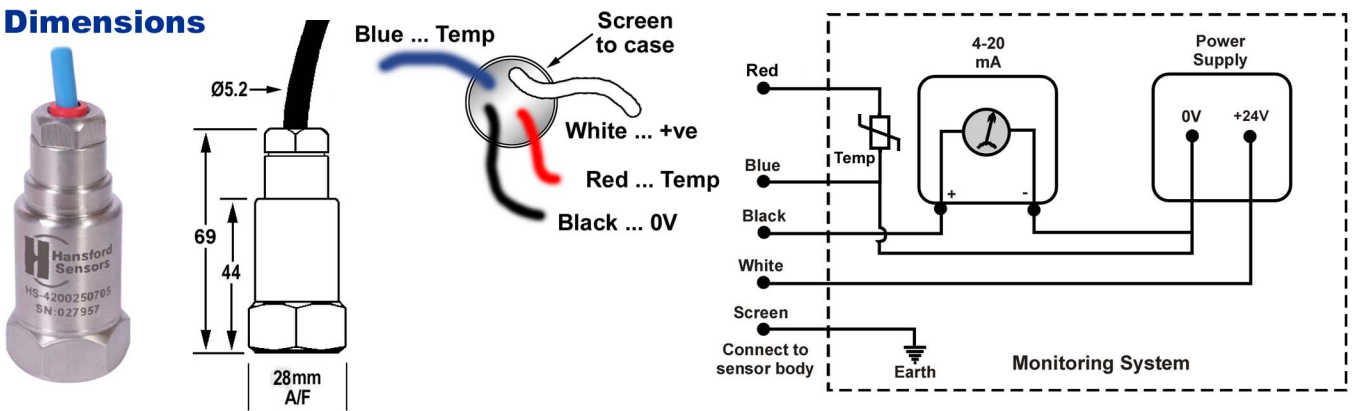


## Frequency Response

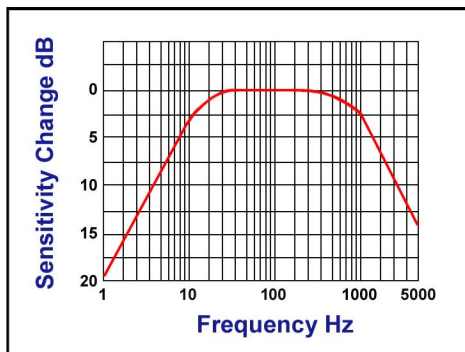

Mounting of sensor to achieve good repeatable readings. Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



## How to order

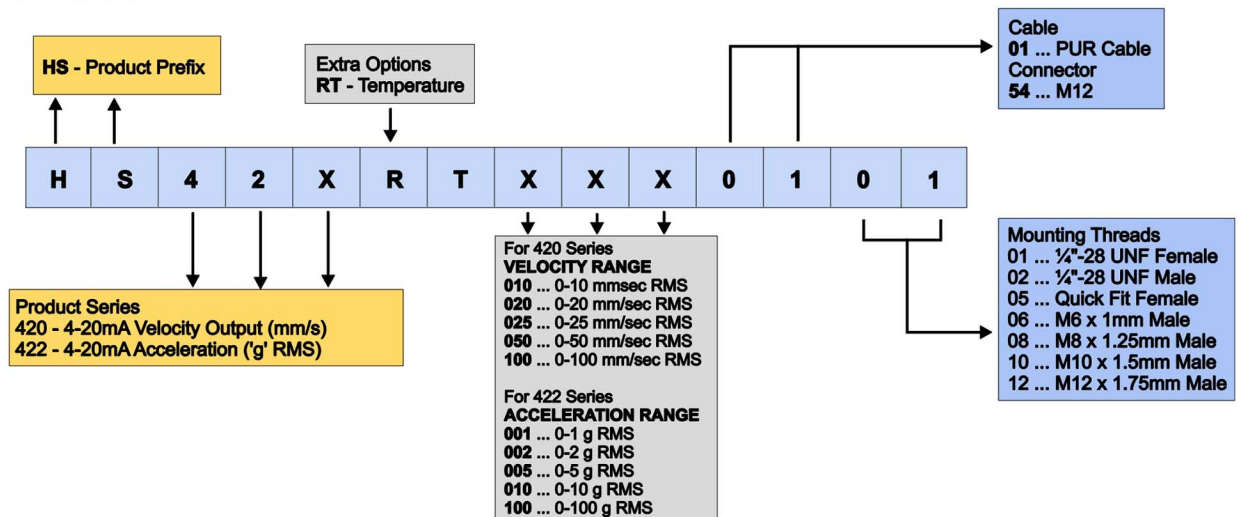

Please contact our Sales Office for information on sensor accessories (mounting studs, etc) and multichannel switch boxes.